

MODEL	FILL	DEPTH*	Capacity
880-4-75P	4"NPT	10-1/2"	7 1/2 GAL
880-3-75P	3"NPT	10-1/2"	7 1/2 GAL
880-2-75P	2"NPT	10-1/2"	7 1/2 GAL
880-4-50P	4"NPT	7-1/2"	5 GAL
880-3-50P	3"NPT	7-1/2"	5 GAL
880-2-50P	2"NPT	7-1/2"	5 GAL

\*includes 1/2" dished bottom

**MATERIALS:**


- **PAN:**  
SEAMLESS FORMED 14GA CR STEEL
- **LID:**  
SEAMLESS 16GA CR STEEL (ALT 5052-H32 ALUMINUM)
- **HINGE ASSY:**  
CARBON STEEL 10GA  
PIN: 5/16"DIA ZINC PLATED  
NUT: 5/16"-18 NYLOC ZINC PLATED
- **HANDLE:**  
1/8" X 1" FB STEEL (ALT 5052-H32 ALUMINUM)
- **LOCK TAB:**  
1/8" X 1" FB STEEL
- **FILL/DRAIN FITTING:**  
SCH 40 STEEL (MIN)
- **SCREEN:**  
16GA CR STEEL, PERF.
- **DRAIN PLUG ASSY:**  
3/8"DIA STEEL ROUND BAR  
WELDED TO 1/2"MPT STEEL PIPE PLUG
- **COATING:**  
POWDERCOAT ZINC RICH EPOXY INT/EXT W/2<sup>ND</sup> COAT EXTERIOR POLYESTER

**CAUTION**

FLAMMABLE OR COMBUSTIBLE LIQUIDS/VAPORS MAY BE PRESENT. KEEP AWAY SPARKS, FLAME, IGNITION SOURCES. EXTINGUISH SMOKING MATERIALS. FOR USE ONLY ON PROPERLY VENTED ABOVEGROUND STORAGE TANKS. KEEP LID CLOSED AND POENINGS SECURELY PLUGGED EXCEPT DURING ACTUAL TANK FILLING.

**HINGE ASSEMBLY DETAIL**  
Die stamped hinge assy. and positive "up stop" tabs

**OPTIONAL SCREEN**  
(removable)

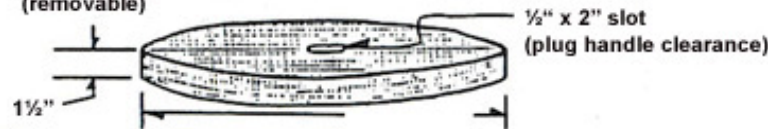

This drawing and design are proprietary to **BAKER INDUSTRIES NORTHWEST**, and may not be copied or duplicated in whole or in part without the written permission of **BAKER INDUSTRIES NW**.

**#880 SERIES TANK TOP SPILL CONTAINMENT FOR ABOVEGROUND TANKS**

**BAKER INDUSTRIES NORTHWEST**

12428 Highway 99 South, Unit 56  
Everett, Washington 98204-5502

Tel: (425)212-3169 • FAX: (425)353-6788 • e-mail: [larry@bakerindnw.com](mailto:larry@bakerindnw.com)  
[www.bakerindustriestnorthwest.com](http://www.bakerindustriestnorthwest.com)

REV		DRAWN	CHECKED	DATE
REV		KF	LRG	10-03-92
REV		KF	LRG	01-07-93
REV		SLG	LRG	03-05-06

